




## Product Introduction:

- Twin hydraulic connections for simple hose assembly.
- 30mm ram stroke available on all models.
- seal reliability.
- Manufactured from high grade anti-corrosive stainless steel, To
- minimize tool maintenance time.
- Non slip tool surface for good diver grip
- Available with quick acting split nut or conventional round reaction nut.
- Ergonomically designed for easy diver,handling.
- Compact design to maximize to suitability.

## 产品简介:

- 公母接头，便于管线连接。
- 30mm活塞行程。
- 密封可靠性强。
- 防腐蚀不锈钢材质。
- 表面防滑设计，便于海下操作。
- 可配快速分离螺母或普通圆螺母。
- 单手作业设计，便于海下使用。
- 设计紧凑，适用性强。

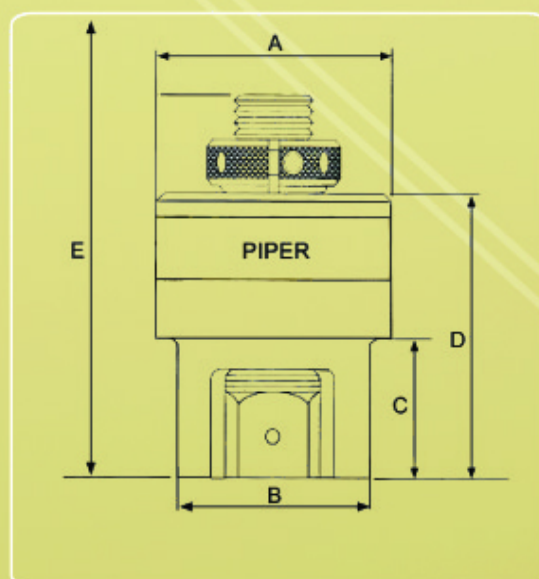

## 技术参数

型号	螺栓直径 (M)	最大负荷 (KN)	尺寸 (mm)					液压面积 (mm <sup>2</sup> )
			A	B	C	D	E	
HP1	16	72.4	52.0	47.0	32.5	94.0	222.0	483.0
HP2	20-22	150.5	66.0	60.0	35.0	89.0	217.0	1001.0
HP3	24-30	247.1	82.0	75.0	50.0	120.0	289.0	1649.0
HP4	33-36	376.7	98.0	92.0	58.0	131.0	307.0	2513.0
HP5	39-42	551.0	114.0	96.0	63.0	136.0	319.0	3674.0
HP6	45-52	883.8	139.0	114.0	70.0	146.0	342.0	5893.0
HP7	56-64	1243.6	164.0	138.0	82.0	161.0	367.0	8294.0
HP8	68-76	1851.4	192.0	157.0	95.0	178.0	400.0	12346.0
HP9	80-90	2316.7	216.0	190.0	109.0	193.0	412.0	15447.0