


## Product Introduction:

- All DP tensioning tools have the capacity to achieve the specified proof load requirements as detailed in EN ISO 898 -1:1999 and ASTM A490m for grade 10.9 Bolts. These feature packed tensioners have been designed with rapid tensioning in mind and offer a safe, reliable and consistent method to simultaneously tension many bolts.
- For maintenance scheduling purposes all Aero DP tensioners offer a fitted mechanical cyclic counter. See at a glance exactly how many pressurization the tensioner has performed.
- Aero DP tensioners are fitted with high quality polyurethane, machine cut seals and high strength anti extrusion rings. The seals are very reliable and can offer many 1000' s of pressure cycles. Seal re- placement is a relatively quick and easy operation.
- Again to increase speed all Aero WTB tensioners are fitted with a spring loaded device that automatically engages the tensioner drive socket with the hexagon nut. The operation is completely transparent to the operator and no time is wasted aligning the tensioner with the nut.

## 产品简介:

- DP系列液压拉伸器是专为各类空间狭小、载荷大、寿命长、速度快等特殊需求设计的多级液压拉伸器。所有DP系列液压拉伸器都达到了EN ISO 898-1: 1999标准。
- 为方便维修，所有DP系列液压拉伸器都配有一个机械“使用寿命计数器”。
- 高品质液压密封件，DP系列液压拉伸器配有高强度抗挤压密封圈，经久耐用，能够承受几千次压力循环。更换密封件方便快捷。
- 旋转接头提供多功能保障，且便于操作，DP系列液压拉伸器都配备可供选择的360° 旋转接头。
- 卡接式螺母驱动器，处于提高拉伸速度的考虑，所有DP系列液压拉伸器都配有一个弹簧装置，可以将拉伸器驱动环与六角螺母自动啮合。

## 技术参数

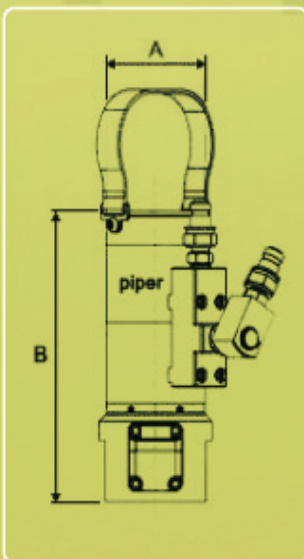

型号	螺栓直径 ( M )	最大负荷 ( KN )	尺寸 (mm)		重量 ( KG )
			A	B	
DP30	30	462.0	70.0	206.0	7.1
DP33	33	570.0	77.0	211.0	7.3
DP36	36	675.0	81.0	216.0	8.0
DP39	39	800.0	88.0	240.0	8.4
DP42	42	928.0	95.0	263.0	9.1
DP45	45	1080.0	104.0	270.0	10.5
DP48	48	1220.0	109.0	280.0	11.8
DP52	52	1450.0	115.0	282.0	14.0
DP56	56	1675.0	121.0	285.0	16.0